

# AENOR

## AENOR Product Certificate Clay products for construction



**034/001783**

AENOR certifies that the organization

**EPIFANIO CAMPO, S.L.**

registered office	CL CRUCEIRO, S/N 36990 VILLALONGA - SANXENXO (Pontevedra - España)
supplies	Clay roofing tiles and fittings
in compliance with	UNE-EN 1304:2014 (EN 1304:2013)
Nº Technical Form	1040203 (see annex)
Production site	FIEITEIRA S/N ALBIXOI 15685 MESÍA (A Coruña - España)
Certification scheme	This Certificate has been granted in accordance with the stipulations of the Specific Rules RP 034.02
	This certificate supersedes 034/001783, dated 2020-10-16
First issued on	2011-12-20
Modified on	2021-01-26
Validity date	2026-01-26

Rafael GARCÍA MEIRO  
Chief Executive Officer


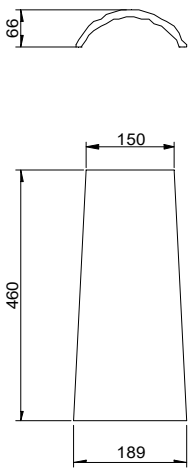
Original Electronic Certificate

AENOR INTERNACIONAL S.A.U.  
Génova, 6. 28004 Madrid. España  
Tel. 91 432 60 00.- www.aenor.com

Product certification body accredited by ENAC, number 1/C-PR271

## AENOR MARK FOR CLAY ROOFING TILES AND FITTINGS

### TECHNICAL FORM N°: 1040203

Stamp and signature:	MANUFACTURER	EPIFANIO CAMPO, S.L.					
	MADE IN:	MESÍA (A CORUÑA)					
	TILE DESCRIPTION:	OVER & UNDER TILE EN 1304					
	BRAND NAME:	TEJA CAMPO 46x20x15					
<b>PRODUCT TECHNICAL CHARACTERISTICS</b>							
<b>MANUFACTURER GUARANTEED VALUES</b>					<b>AENOR REQUIRED VALUES</b>		
<b>REQUIRED</b>							
<b>Nominal dimensions (mm)</b>				Structural characteristics (% faults)	ISO 2859-1	LCA 2,5 (I)	LCA 2,5 (I)
		Length	Width				
Individuals		X	460				
Overlap							
<b>Over and Under Tiles</b>				Length tolerance (%)	EN 1024	± 2,0	± 2,0
		Width tolerance (%) (not applicable in Over and Under)		N/A		N/A	
		Maximum width	Minimum width				
		189	150				
<b>Impermeability</b>				Uniformity of the transverse profile (mm) (Only for Over and Under Tiles)	EN 1024	≤ 15	≤ 15
Category 1		X	Test method 1				
Category 2			Test method 2	X			
<b>Frost resistance</b>				Camber/Twist (%)	EN 539-1	≤ 1,5	≤ 1,5
Level 1 (n° cycles without damages ≥ 150)						X	
Level 2 (n° cycles without damages ≥ 90)							
<b>OPTIONAL CHARACTERISTICS ANNEX D RP 34 02</b>							
		YES	NO	Impermeability	Mean Value	≤ 0,01	≤ 0,8
Impermeability (D.2 RP 34.02)			X		Individual Value	≤ 0,01	≤ 0,85
Frost Resistance (D.3 RP 34.02)			X		Mean Value	N/A	N/A
					Individual Value	N/A	N/A
<b>TILE SKETCH</b>							
							
Piece without water repellent treatment							
<b>Accessories:</b>							
UNDER RIDGE PIECE, EAVE ROOF TILE, HIP-RIDGE AND STRAIGHT RAKE							
<b>Additional information given by the manufacturer <sup>(1)</sup></b>							
Unitary mass (in grams):							
Roof tiles number in m <sup>2</sup> (with one decimal):							
Length distance between battens (cm):						VARIABLE ACCORDING TO OVERLAP	
Surface finish:							
Mass coloration:						RED, BROWN, ANTHRACITE	
Fixing types:						STAINLESS STEEL HOOKS, SCREWS, POLYURETHANE FOAM AND PROFILES	
Further information:							

<sup>(1)</sup> This information is out of the AENOR Mark and ENAC accreditation scopes. AENOR is not responsible for the information in this square